

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/090326 A1**

(51) International Patent Classification<sup>7</sup>: **F03D 1/06**

(21) International Application Number:  
PCT/EP2003/003813

(22) International Filing Date: 12 April 2003 (12.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicants (for all designated States except US): **GENERAL ELECTRIC COMPANY** [US/US]; 1 River Road, Schenectady, NY 12345 (US). **SCHELLINGS, Vincent** [NL/NL]; Park de Kotten 160, NL-7522 EH Enschede (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DELUCIS, Nicolas** [DE/DE]; Emdener Strasse 30, 48155 Münster (DE).


Published:

— with international search report

(74) Agents: **HILLERINGMANN, Jochen et al.**; Deichmannhaus am Dom, 50667 Cologne (DE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **REINFORCED HUB FOR THE ROTOR OF A WIND ENERGY TURBINE**

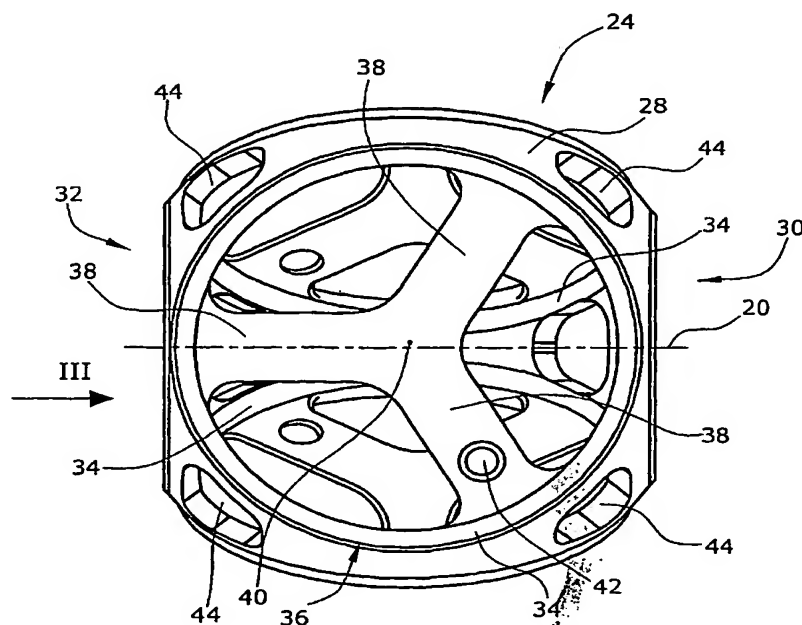

(57) Abstract: The hub for the rotor (22) of a wind energy turbine (10) comprises a hollow body (28) rotatable around a rotation axis and provided with at least one flange (34) for mounting to the hollow body (28) a bearing for a rotor blade (26) and at least two stiffening webs (38) integrally formed with the hollow body (28) and radially extending within a flange area (36) of the hollow body (28) surrounded by the flange (34) to the center (40) of the flange area (36), wherein at least two openings are provided within the flange area (36) of the hollow body (28).

WO 2004/090326 A1

6/10/04

## Hub for the rotor of a wind energy turbine

### **Field of the Invention**

The present invention relates to a hub for the rotor of a wind energy turbine and, in particular, to a new construction of such a hub resulting in a light-weighted overall design of the hub.

5

### **Background of the Invention**

One concern in wind energy turbine is weight of the nacelle. In particular the rotatable parts of the nacelle should have a rather low weight. This is true in particular for modern high power wind energy turbines.

10

One approach for reducing weight is to reduce the wall thickness of the rotating elements of the nacelle. However, reducing the wall thickness does result in a reduced strength and stiffness of the rotating element. In particular, the hub of the rotor is subjected to forces resulting from wind acting on the rotor blades and forces resulting from loads due to the rotation of the hub. The hub must be stiff enough so that these forces do not cause deformations. In particular within the flanges for mounting the bearings for the rotor blades the hub must be designed rather stiff so that an ovalization can be prevented which in turn would damage the rotor blade bearings and pitch drives.

20

Accordingly, an object of the present invention is to provide a hub for the rotor of a wind energy turbine which has a relative low weight and is stiff enough in order to withstand the loads which during operation of the wind energy turbine acts on the hub.

25

### Summary of the Invention

This object is solved according to the invention by a hub for the rotor of a wind energy turbine comprising

- 5       - a hollow body rotatable around a rotation axis and provided with at least one flange for mounting to the hollow body a bearing for a rotor blade and
- and least two stiffening webs integrally formed with the hollow body and radially extending within a flange area of the hollow body surrounded by the flange to the center of the flange area,
- 10     - wherein at least two openings are provided within the flange area of the hollow body.

The hub according to the invention is provided with a hollow body which is rotatable around a rotation axis. The hollow body is provided with at least one  
15 flange to which a rotor blade bearing can be mounted. The flange defines a flange area which normally is defined by a hole.

According to the invention, within the hole there are arranged at least two stiffening or strengthening or reinforcing webs integrally formed with the  
20 hollow body and radially extending from the flange to the center of the flange area. The webs are arranged within the flange area like spokes of a wheel and provide stiffening, strengthening and reinforcing of the flange. The at least two stiffening webs divide the flange area into at least two openings separated by the stiffening webs.

25

According to one aspect of the invention, two stiffening webs are provided within each flange area and build an angle between each other of substantially 180°. It is preferred that these two stiffening webs are arranged parallel to the rotation axis of the hub. As an alternative it is also possible that the stiffening  
30 webs are arranged such that they extend perpendicular to the rotation axis.

Generally spoken, according to another preferred embodiment of the present invention, the stiffening webs are homogeneously distributed within the flange area and are displaced relative to each other by an angle substantially equal to  $360^\circ$  divided by a number of the stiffening webs. For example in case of three  
5 stiffening webs the angles therebetween are substantially  $120^\circ$  and in case of four stiffening webs the angle therebetween is substantially  $90^\circ$ .

In case of three stiffening webs it is preferred that one of the stiffening webs extends substantially parallel to the rotation axis of the hollow body. In case of  
10 four stiffening webs it is preferred to have two of them extending parallel to the rotation axis and the other two of them extending perpendicular to the rotation axis.

According to the invention the stiffening webs can be solid or hollow and can  
15 have a decreasing width and/or thickness towards the center of the flange area. In other words the stiffening webs at the center of the flange area are smaller in width and/or thickness than at its radially outer ends adjacent the flange.

It is also possible according to the invention that within a flange area there are  
20 provided several sets of stiffening webs displaced along a rotor blade pitch axis perpendicular to a plane defined by the flange. The stiffening webs of the individual sets are not connected among each other or are connected. In other words the stiffening webs of the flange area not necessarily are arranged in a  
25 common plane but are arranged in different adjacent planes.

In another preferred embodiment of the present invention the stiffening webs of the individual sets of stiffening webs are rotated against each other from set to set around the rotor blade pitch access.

30 In another embodiment of the present invention a pitch drive can be mounted to at least one of the stiffening webs. This individual stiffening web is provided

with an aperture for a rotor shaft of a pitch drive for rotating a rotor blade. Within the area of this aperture, the width or thickness or both of the individual stiffening web is increased in order to increase the stiffness of the web within the area of the pitch drive.

5

The present invention can be used in a hub irrespective of the number of rotor blades. Accordingly, the hub according to the invention can be for a rotor with one, two or three rotor blades. Also more than three rotor blades can be mounted to the hub according to the invention which is provided with a  
10 number of flanges identical to the number of rotor blades.

Most preferably, the hollow body of the hub comprises at least two or three flanges each defining a flange area. Each flange area is provided with at least two stiffening webs wherein the shape, design, number and/or relative  
15 arrangement of the stiffening webs within each flange area is identical or different from flange area to flange area.

In order to further reduce the overall weight of the hub additional apertures can be provided within areas between adjacent flanges and the first and the  
20 second end of the hollow body both arranged in the direction of the rotation axis. These first and second ends also comprise openings or holes wherein the hole at the second end opposite to the shaft of the rotor is designed as a man hole. It is preferred that this man hole is located within a deepened portion of the hub located at the second end. This design provides increased stiffness of  
25 the hub at its man hole end. The first end of the hub to which the hollow shaft of the wind energy turbine is mounted preferably is also provided with a hole but can be closed as an alternative.

### **Brief Description of the Drawings**

30 The invention will be described in more detail referring to the drawing wherein

Fig. 1 shows a side view of a wind energy turbine the rotor of which is provided with a hub according to the invention,

Fig. 2 is an enlarged view of the hub of the wind energy turbine of Fig. 1 according to a first embodiment of the invention,

Fig. 3 is a view when looking at the hub in the direction of arrows III of Fig. 1 and 2,

Fig. 4 is a view of the hub similar to that of Fig. 2 but with the hub being rotated by 120°,

Fig. 5 is a perspective view of the hub according to Figs. 2 to 4,

Fig. 6 is a view to an alternative embodiment of a hub according to the invention,

Fig. 7 is a view to a hub according to another embodiment of the invention,

Fig. 8 is a view to a hub according to a further embodiment of the invention,

Fig. 9 is a cross-sectional view taken along line IX - IX of Fig. 8, and

Fig. 10 is a perspective view of a hub according to a last embodiment of the invention.

### **Description of Preferred Embodiments of the Invention**

Fig. 1 shows the overall construction of a wind energy turbine 10 comprising a tower 12 and a nacelle 14 arranged on top of the tower 12 and rotatable around vertical axis 16. The nacelle 14 comprises a housing 18 within which a shaft (not shown) is rotatably arranged around a horizontal axis 20. Mounted to the shaft is a rotor 22 comprising a hub 24 and three rotor blades 26

radially extending from the hub 24. The horizontal axis 20 is identical to the rotation axis of the rotor 22.

A preferred embodiment of the hub 24 is shown in more detail in Fig. 2. The  
5 hub 24 comprises a hollow body 28 made of a suitable cast material which is basically known to persons skilled in the art. Other materials providing the required rigidity can also be used. The hollow body 28 comprises a first end 30 and a second end 32 wherein the hollow shaft (not shown) of the wind energy turbine 10 is mounted to the first end 30 of the hollow body 28. Three flanges  
10 34 are arranged at the outside of the hollow body 28 wherein these three flanges 34 are displaced by 120°. Each flange 34 defines a flange area 36 within the respective flange 34 and extending in a plane. Within each flange area 36, in this embodiment of the invention there are provided three stiffening webs 38 integrally formed with the wall of the hollow body 28 and  
15 extending from the flange 34 radially inwardly to the center 40 of the flange area 36 where the three stiffening webs 38 are integrally connected to each other. The hollow body 28 including the stiffening webs 38 are formed according to a casting process which processes are basically known for the manufacture of hubs of the rotors of wind energy turbines. Other  
20 manufacturing processes for making the hub are also possible.

As can be seen from Fig. 2, the three stiffening webs 38 together are forming the shape of a three-arm-star wherein one of the stiffening webs extend parallel to the rotation axis 20 with an angle of 120° between adjacent  
25 stiffening webs 38. One of the stiffening webs 38 comprises an aperture 42 through which the rotor shaft of a rotor blade pitch drive (both not shown) extends for rotating the rotor blade. The pitch drive can be mounted to that specific stiffening web 38.

30 As can be seen from Figs. 2 to 5, additional apertures 44 are arranged in the wall of the hollow body 28 within areas defined by two adjacent flanges 34 and the openings at the first and second ends 30,32, respectively. Providing these

six holes 44 in these areas further reduces the overall weight of the hollow body 28.

5 Figs. 4 and 5 show further views of the hub 24 making more evident the specific design of the hub 24 resulting a light-weighted but stiff overall construction of the hub 24.

10 Figs. 6 to 10 show other embodiments of a hub according to the invention. In these Figures, for parts and elements of the hubs identical or similar to the elements of the hub 24 according to Figs. 2 to 5, the same reference numerals are used.

15 Hub 24 of Fig. 6 comprises four stiffening webs 38 per each flange area 36 wherein one of the stiffening webs 38 is provided with a hole 42 for a pitch drive shaft wherein the thickness of the stiffening web 38 within the area of this aperture 42 is increased. The four stiffening webs 38 are displaced relative to each other by 90° so that the four stiffening webs 38 are in the form of a cross. The remaining design of the hub 24 of Fig. 6 is similar to that of the hub of Figs. 2 to 5.

20

Fig. 7 shows a hub 24 the hollow body 28 of which comprises two stiffening webs 38 which extend parallel to the rotation axis 20 of the hub 24 and which are increased in width and/or thickness within the areas adjacent to the flange 34. In its remaining parts the hub 24 has a design similar to that of the hub of  
25 Figs. 2 to 5.

Another embodiment of a hub 24 is shown in Figs. 8 and 9. In this embodiment, two sets of stiffening webs 38 arranged as shown in Fig. 2 are located within each flange area. As can be seen from the cross-sectional view  
30 according to Fig. 9, the two sets of stiffening elements are displaced along a rotor blade pitch axis 46.



Finally, Fig. 10 shows a perspective view to another hub 24 from the direction of the second end 32 thereof in which one can see that the man hole 48 arranged at this second end 32 is located within a deepened portion 50 of the wall of the hollow body 28. This deepened portion increases stiffness and rigidity of the hollow body 28. The design of the stiffening webs of the hub 24 of Fig. 10 is similar to that of the embodiment of Fig. 7. However, also other stiffening web designs can be used in a hub 24 having a deepened portion 50 for the man hole 48 at the second end 32 of the hollow body 28.

- 10 The invention was described referring to individual embodiments thereof as shown in Figs. 1 to 10. However, it is to be noted that the invention is not limited to the specific embodiments shown and that the specific design features of all the embodiments shown can be used separately and in combination with each other without departing from a scope of the invention.
- 15 Accordingly, the scope of the invention exclusively is defined by the accompanying claims.

**CLAIMS**

1. Hub for the rotor (22) of a wind energy turbine (10) comprising
  - a hollow body (28) rotatable around a rotation axis and provided with at least one flange (34) for mounting to the hollow body (28) a bearing for a rotor blade (26) and
  - and least two stiffening webs (38) integrally formed with the hollow body (28) and radially extending within a flange area (36) of the hollow body (28) surrounded by the flange (34) to the center (40) of the flange area (36),
  - wherein at least two openings are provided within the flange area (36) of the hollow body (28).
2. Hub according to claim 1, wherein the stiffening webs (38) are homogeneously distributed within the flange area (36) and are displaced relative to each other by an angle substantially equal to  $360^\circ$  divided by the number of the stiffening webs (38).
3. Hub according to claim 1 or 2, wherein at least one of the stiffening webs (38) extends substantially parallel to the rotation axis of the hollow body (28).
4. Hub according to any one of claims 1 to 3, wherein the width or the thickness or both of the stiffening webs (38) decreases towards the center (40) of the flange area (36).
5. Hub according to any one of claims 1 to 4, wherein the stiffening webs (38) are solid or hollow.
6. Hub according to any one of claims 1 to 5, wherein at least one of the stiffening webs (38) is provided with an aperture (42) for a rotor shaft

(20) of a driving means for rotating a rotor blade (26) when mounted via the bearing to the flange (34).

7. Hub according to claim 6, wherein the width or thickness or both of the at least one stiffening web (38) is increased within the area of the aperture (42).
8. Hub according to any one of claims 1 to 7, wherein the stiffening webs (38) are arranged within a plane tilted with respect to the rotation axis of the hollow body (28).
9. Hub according to any one of claims 1 to 8, wherein the stiffening webs (38) are arranged in at least two sets of at least two stiffening webs (38) and wherein the two sets of stiffening webs (38) are displaced along a rotor blade (26) pitch axis (46) perpendicular to a plane defined by the flange (34).
10. Hub according to claim 9, wherein the stiffening webs (38) from set to set are displaced to each other around the rotor blade (26) pitch axis (46).
11. Hub according to any one of claims 1 to 10, wherein the number of stiffening webs (38) is three or four.
12. Hub according to any one of claims 1 to 11, wherein the hollow body (28) comprises at least two and preferably three flanges (34) each defining a flange area (36) and wherein each flange area (36) is provided with at least two stiffening webs (38) with the shape, number, and/or arrangement of the stiffening webs (38) within each flange area (36) being identical or different.
13. Hub according to any one of claims 1 to 12, wherein the hollow body (28) comprises a first end (30) for mounting to a rotor shaft (20) and a

second end (32) opposite to the first end (30) and wherein the hollow body (28) within areas between adjacent flanges (34) and its first or second end (32) or both ends is provided with additional apertures (44).

14. Hub according to claim 13, wherein the hollow body (28) in case of comprising three flanges (34) is provided with three additional apertures (44) adjacent its first and second ends (30,32).
15. Hub according to any one of claims 1 to 14, wherein the hollow body (28) comprises a first end (30) for mounting to a rotor shaft (20) and a second end (32) opposite to the first end (30) and wherein the hollow body (28) at its first and/or second end (30,32) comprises a hole (42).
16. Hub according to claim 15, wherein the hollow body (28) at its second end (32) comprises a deepened area (50) with a man hole (48) located therein.

- 1/6 -

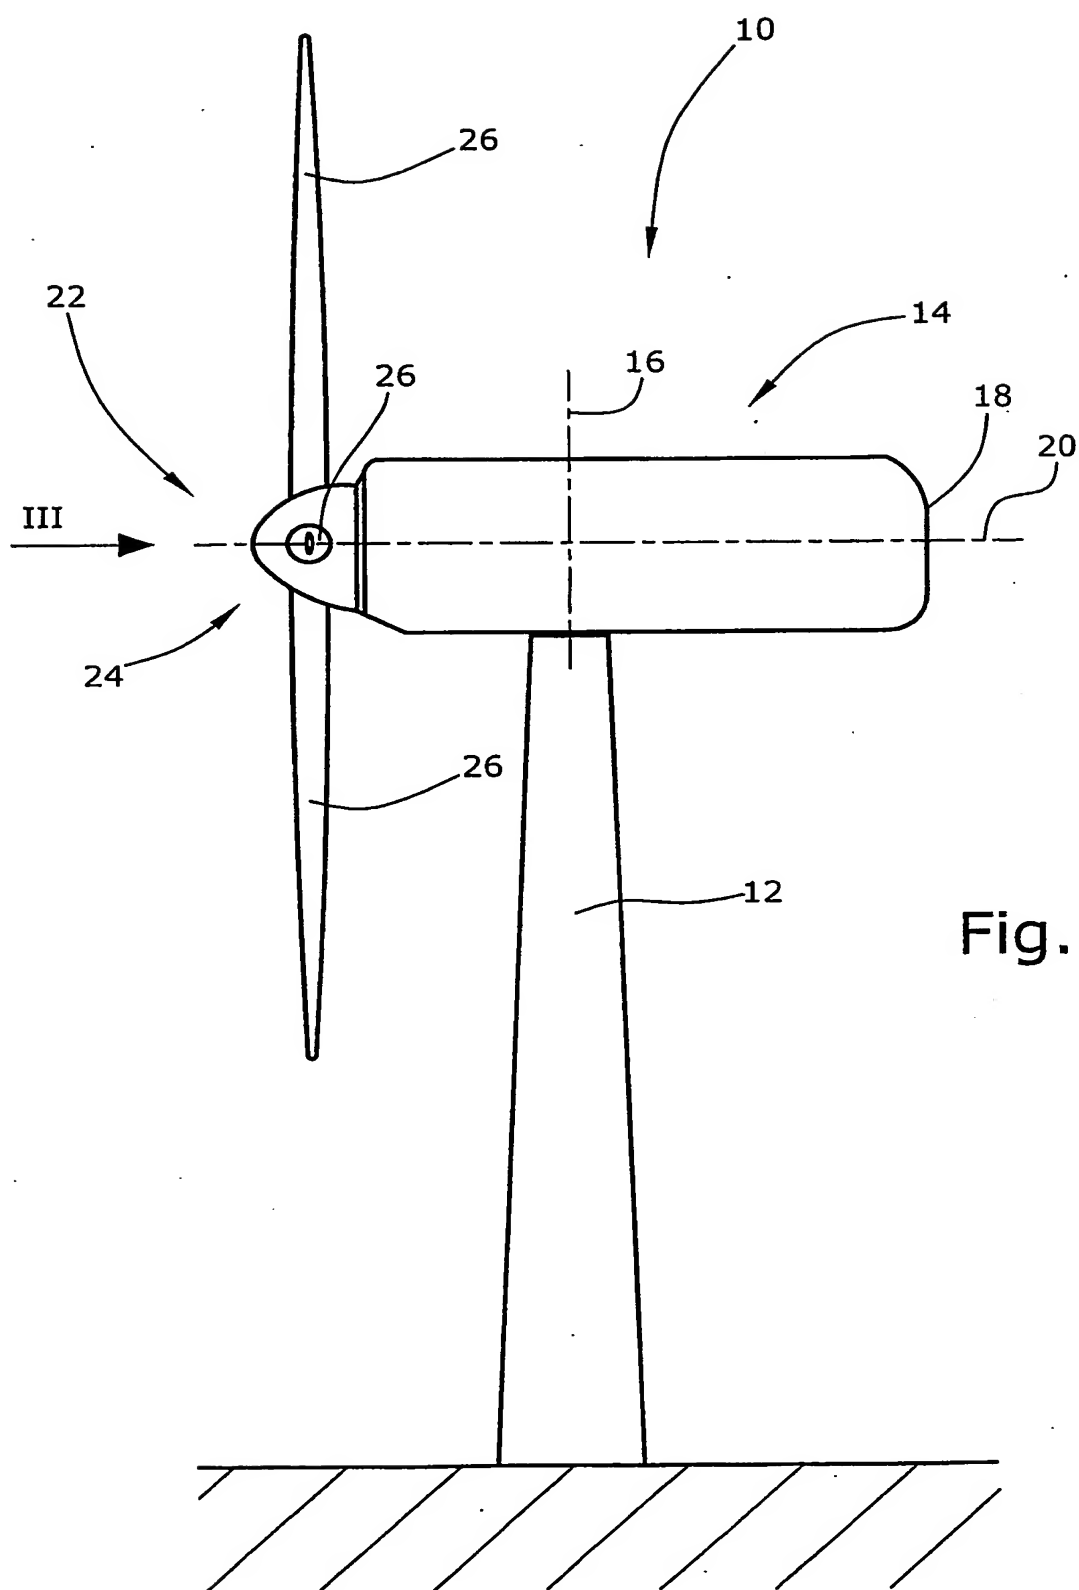


Fig. 1

- 2/6 -

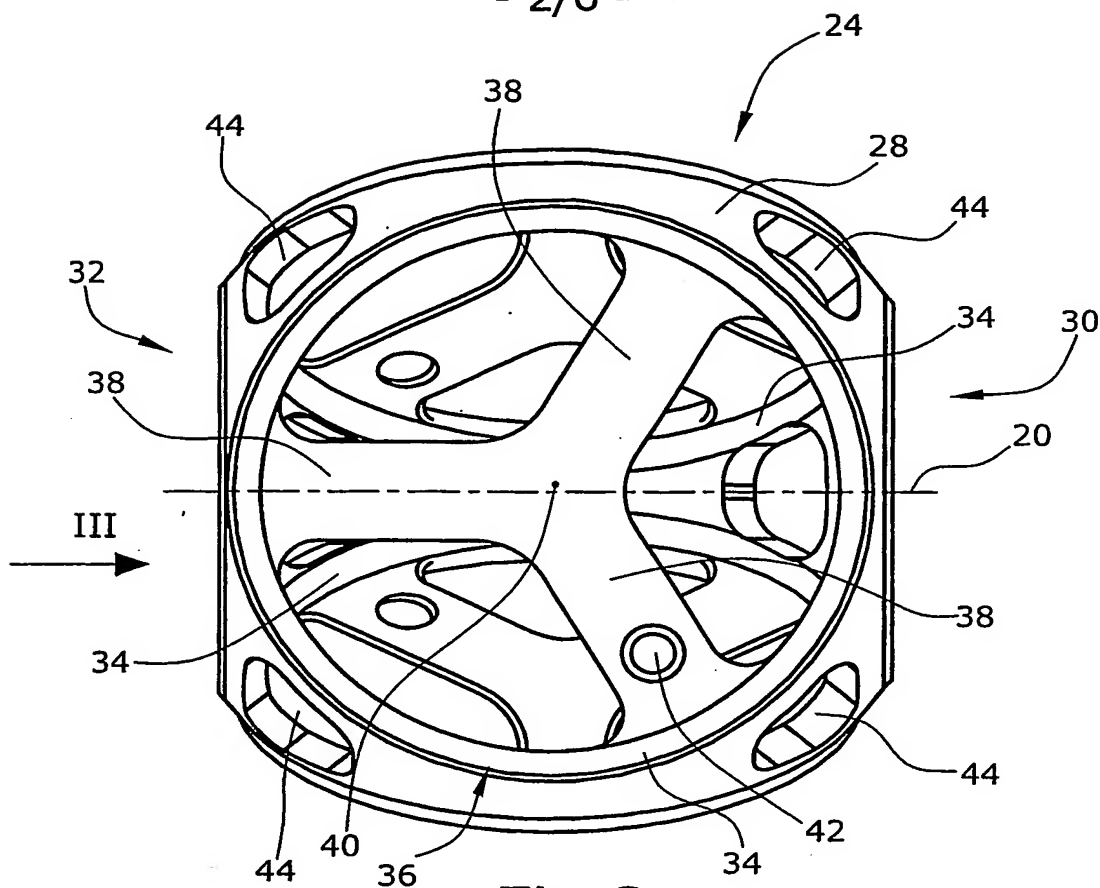


Fig. 2

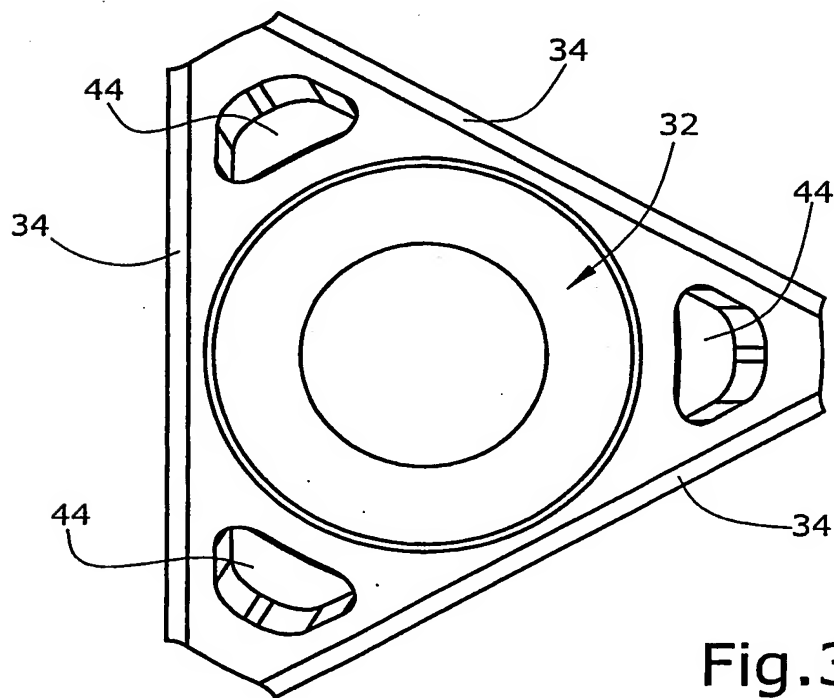


Fig. 3

- 3/6 -

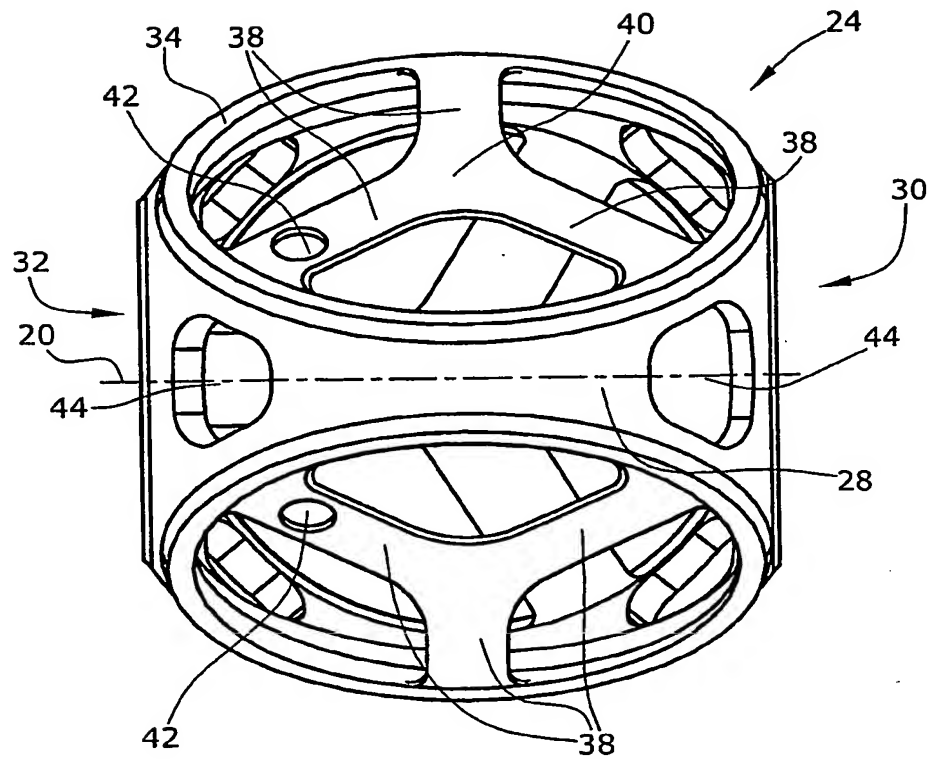


Fig. 4



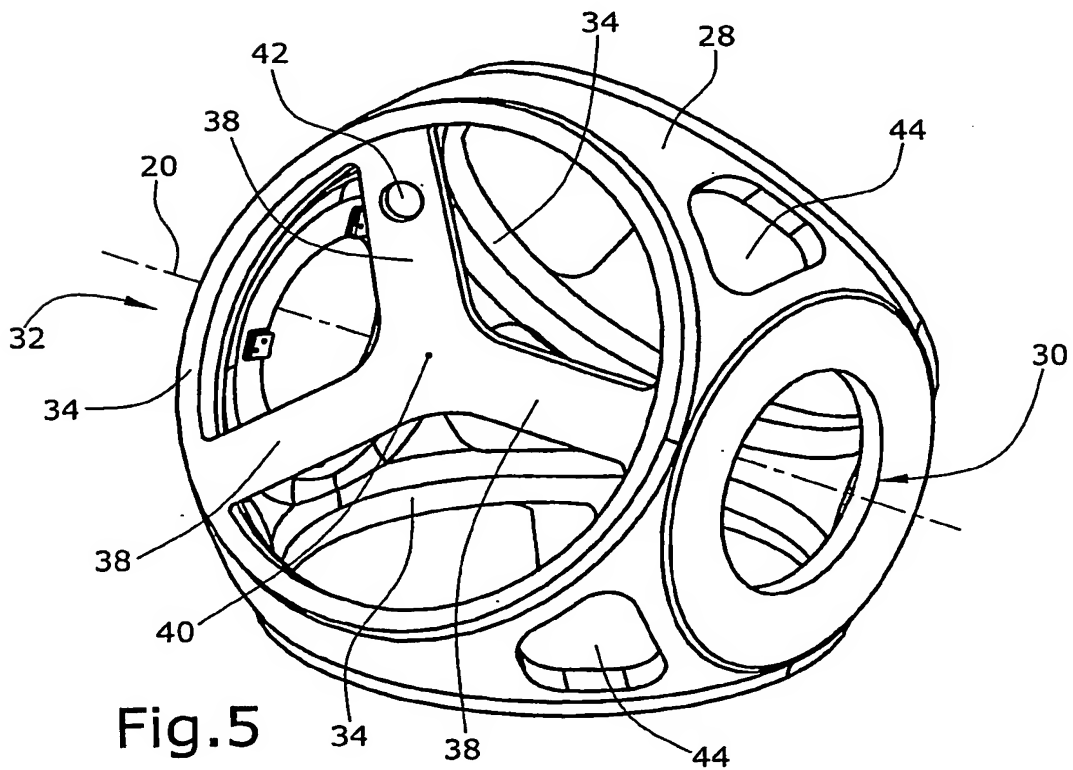


Fig. 5

- 4/6 -

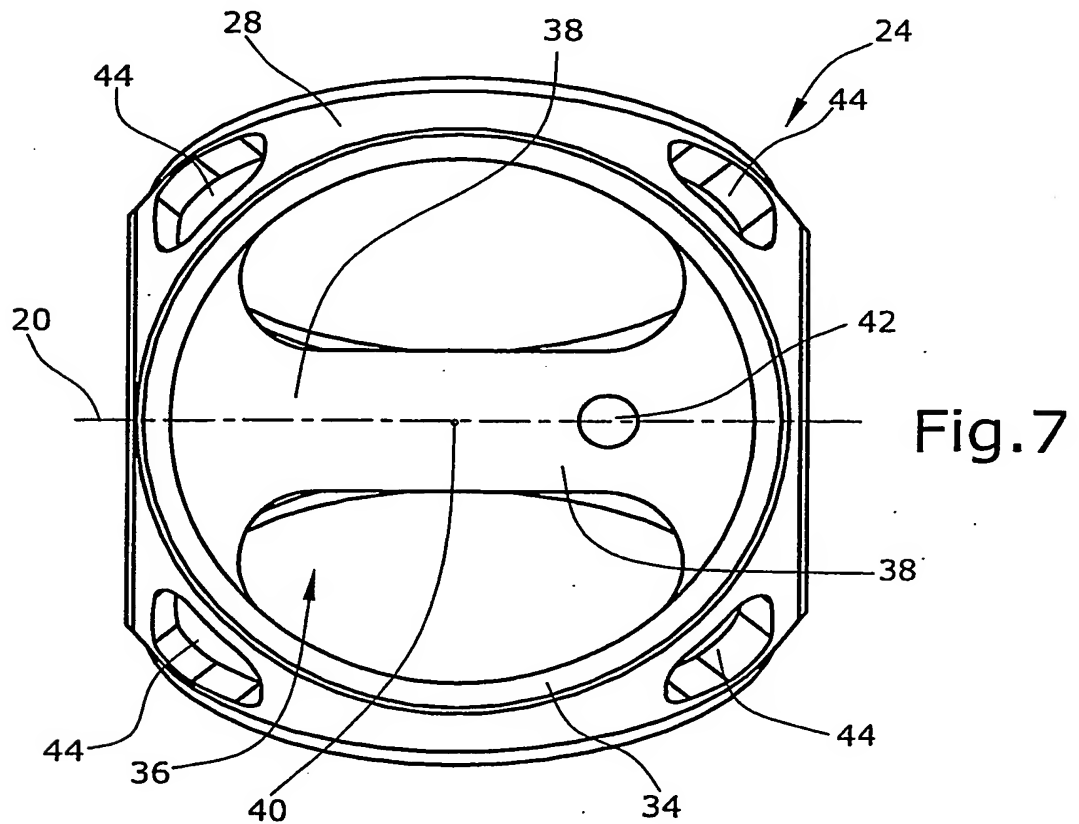

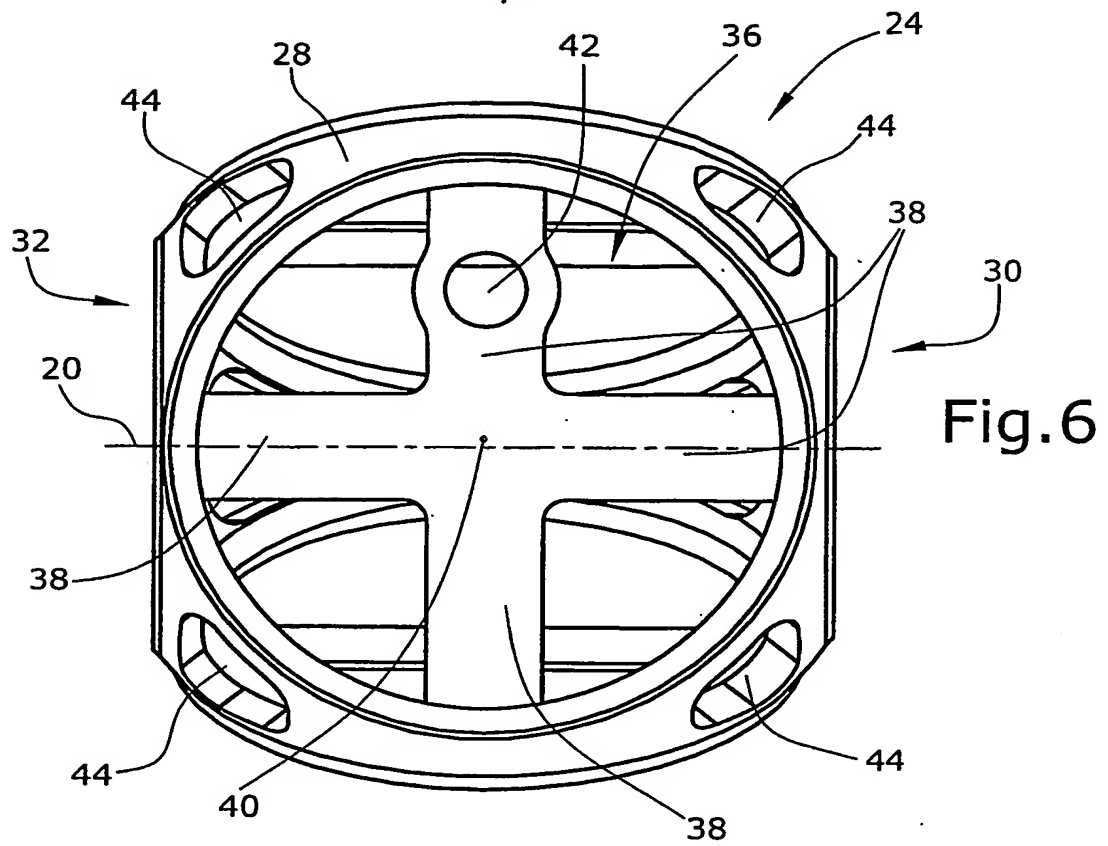

- 5/6 -

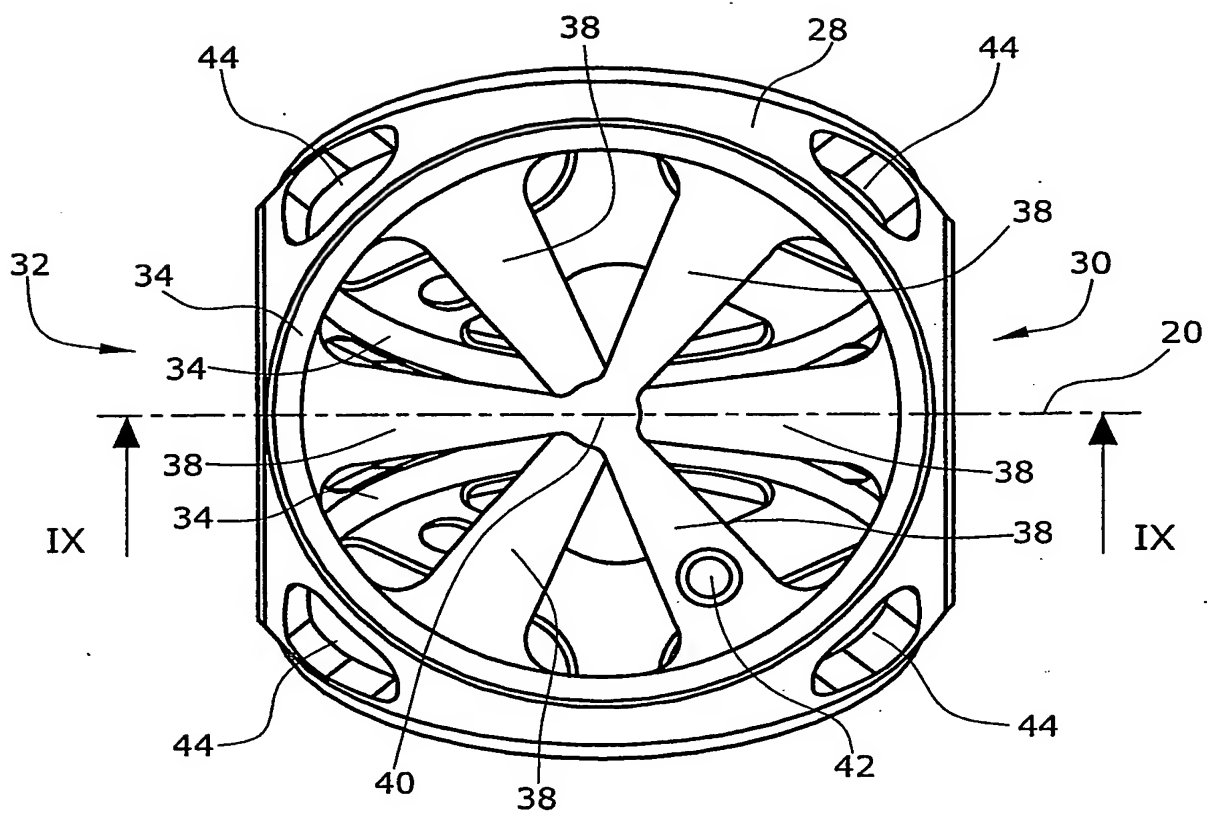


Fig.8

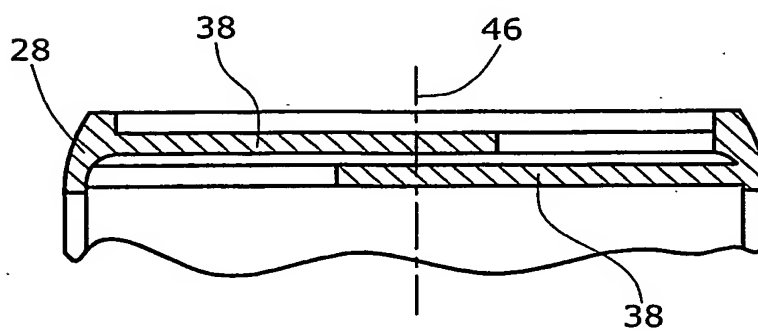


Fig.9

- 6/6 -

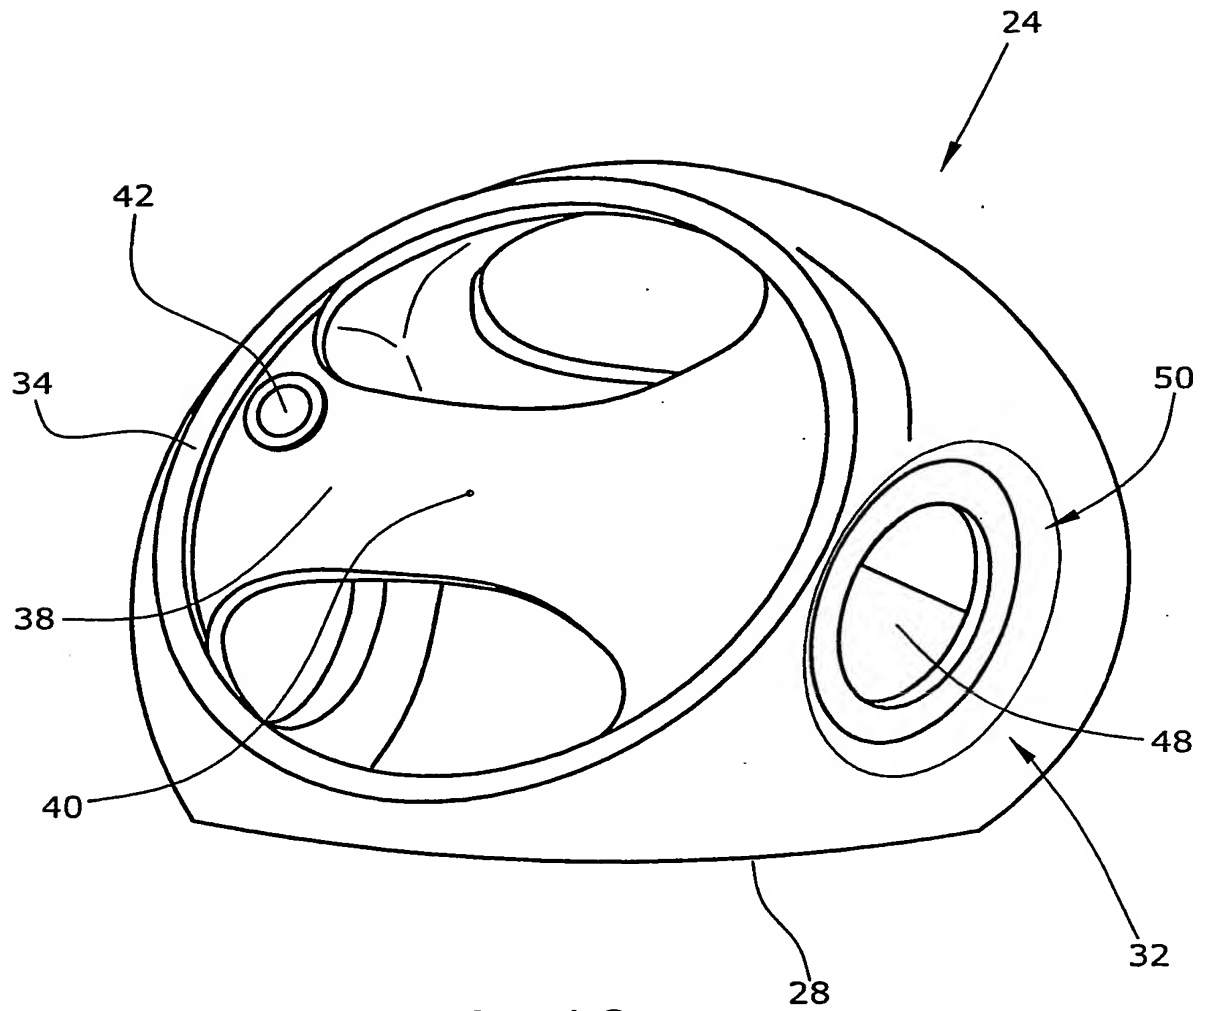


Fig.10

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP03/03813

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F03D1/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F03D B64C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01 42647 A (SCHERER RALF ROGER ;HEERKES HENDRIK JAN (NL); AERPAC HOLDING B V ( ) 14 June 2001 (2001-06-14) abstract page 10, line 33 - line 36; figures 4,11	1-16
A	US 4 863 352 A (HAUSER AMBROSE A ET AL) 5 September 1989 (1989-09-05) abstract column 2, line 34 - line 37; figures 2,3	1
A	US 4 668 109 A (BASSO ROBERT J) 26 May 1987 (1987-05-26) column 2, line 49 - line 57; figures 2,3	1
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

15 December 2003

Date of mailing of the international search report

29/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Criado Jimenez, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/3/03813

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 546 307 A (PORSCHE AG) 16 June 1993 (1993-06-16) abstract column 2, line 12 - line 52; figures 1,2,5 ---	1
A	US 4 995 023 A (MUELLER JACQUES ET AL) 19 February 1991 (1991-02-19) abstract column 2, line 44 - line 56; figures ---	1
A	US 4 759 459 A (MORONEY JAMES E ET AL) 26 July 1988 (1988-07-26) abstract; figures ---	1
A	US 4 112 693 A (COLLIN ALVARO L ET AL) 12 September 1978 (1978-09-12) abstract; figures ---	1
E	WO 03 064854 A (NIELSEN THOMAS KRAG ;NEG MICON AS (DK); SORENSEN STEFFEN (DK)) 7 August 2003 (2003-08-07) abstract; figures -----	1-16

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP03/03813

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0142647	A	14-06-2001	NL	1013807 C2		05-07-2001
			AU	2558001 A		18-06-2001
			EP	1238196 A2		11-09-2002
			WO	0142647 A2		14-06-2001
US 4863352	A	05-09-1989	CA	1253351 A1		02-05-1989
			DE	3538599 A1		15-05-1986
			FR	2572769 A1		09-05-1986
			GB	2167136 A , B		21-05-1986
			IT	1186327 B		26-11-1987
			JP	61125998 A		13-06-1986
US 4668109	A	26-05-1987	NONE			
EP 0546307	A	16-06-1993	DE	4141464 A1		17-06-1993
			DE	9117160 U1		25-07-1996
			DE	59201541 D1		06-04-1995
			EP	0546307 A1		16-06-1993
			ES	2069363 T3		01-05-1995
US 4995023	A	19-02-1991	CH	675517 A		15-10-1990
			DE	69000037 D1		30-04-1992
			EP	0378125 A1		18-07-1990
			HK	158296 A		30-08-1996
			JP	2227695 A		10-09-1990
			JP	2969523 B2		02-11-1999
			SG	9590500 A2		18-08-1995
US 4759459	A	26-07-1988	NONE			
US 4112693	A	12-09-1978	NONE			
WO 03064854	A	07-08-2003	WO	03064854 A1		07-08-2003